


# STRUCTURAL DESIGN TIPPING FORCE



## BLOCK MOULDS

benefits of modular construction

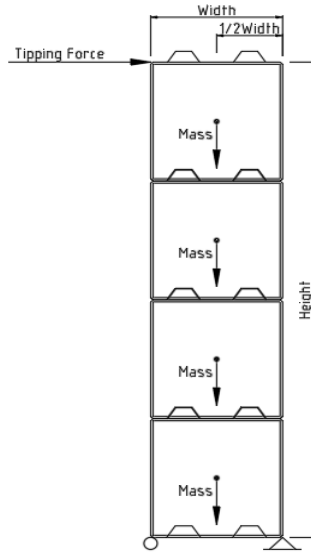

Weight					
	Width	40 cm	40 cm	80 cm	80 cm
	Height	40 cm	80 cm	40 cm	80 cm
Length	40 cm	154 kg	307 kg	307 kg	614 kg
	80 cm	307 kg	614 kg	614 kg	1229 kg
	120 cm	461 kg	922 kg	922 kg	1843 kg
	160 cm	614 kg	1229 kg	1229 kg	2458 kg

Tipping force one block (short side)					
	Width	40 cm	40 cm	80 cm	80 cm
	Height	40 cm	80 cm	40 cm	80 cm
Length	40 cm	0,8 kN	0,8 kN	3,1 kN	3,1 kN
	80 cm	1,5 kN	1,5 kN	6,1 kN	6,1 kN
	120 cm	2,3 kN	2,3 kN	9,2 kN	9,2 kN
	160 cm	3,1 kN	3,1 kN	12,3 kN	12,3 kN

Weight					
	Width	30	30	60	60
	Height	30	60	30	60
Length	30 cm	65 kg	130 kg	130 kg	259 kg
	60 cm	130 kg	259 kg	259 kg	518 kg
	90 cm	194 kg	389 kg	389 kg	778 kg
	120 cm	259 kg	518 kg	518 kg	1037 kg
	150 cm	324 kg	648 kg	648 kg	1296 kg
	180 cm	389 kg	778 kg	778 kg	1555 kg
	210 cm	454 kg	907 kg	907 kg	1814 kg
	240	518 kg	1037 kg	1037 kg	2074 kg

Tipping force one block (short side)					
	Width	30 cm	30 cm	60 cm	60 cm
	Height	30 cm	60 cm	30 cm	60 cm
Length	30 cm	0,3 kN	0,3 kN	1,3 kN	1,3 kN
	60 cm	0,6 kN	0,6 kN	2,6 kN	2,6 kN
	90 cm	1,0 kN	1,0 kN	3,9 kN	3,9 kN
	120 cm	1,3 kN	1,3 kN	5,2 kN	5,2 kN
	150 cm	1,6 kN	1,6 kN	6,5 kN	6,5 kN
	180 cm	1,9 kN	1,9 kN	7,8 kN	7,8 kN
	210 cm	2,3 kN	2,3 kN	9,1 kN	9,1 kN
	240 cm	2,6 kN	2,6 kN	10,4 kN	10,4 kN

CHECK GROUND STABILITY AND CONSISTANCY BEFOR BUILDING A STRUCTURE  
 CHECK WITH A STRUCTURAL ENGINEER BEFORE BUILDING AND LOADING A STRUCTURE  
 USE OF THESE CALCULATIONS IS FOR YOUR OWN RISK AND RESPONSIBILITY

**MAILING ADDRESS**

Simon Koopmanstraat 185  
 1693 BE Wervershoof  
 The Netherlands  
 info@blockmoulds.com

**VISITING ADDRESS**

Julianastraat 31  
 1663 JL Avenhorn  
 The Netherlands

**COMPANY ID** 73324396

**VAT** NL859461361B01

**BANK** Rabobank

**IBAN** NL79 RABO 0335 7223 26

[WWW.BLOCKMOULDS.COM](http://WWW.BLOCKMOULDS.COM)